



Rooftek Solutions – Sheets / Wall Cladding

CGI (Corrugated Iron)



16mm
762mm

Five degree Minimum Pitch
Tolerance L±5mm W±2mm



BMT	SPANS:	Internal	End	Overhang
.35	Walling	1800	1200	200
.42	Roofing	1200	900	200
.48	Roofing	1800	1300	250

Superdek / Trimdek



28mm
762mm

Two degree Minimum Pitch
Tolerance L±5mm W±2mm



BMT	SPANS:	Internal	End	Overhang
.35	Walling	2000	1800	150
.42	Roofing	1900	1300	150
.48	Roofing	2600	1900	200

Topdek 700 / Kliplok



42mm
700mm

One degree Minimum Pitch
Tolerance L±5mm W±2mm




BMT	SPANS:	Internal	End	Overhang
.42	Walling	2700	2250	300
.42	Roofing	2200	2000	200
.48	Roofing	2950	2400	200

Prodek




50mm
650mm

One degree Minimum Pitch
Tolerance L±5mm W±2mm




BMT	SPANS:	Internal	End	Overhang
.42	Walling	3600	3250	200
.42	Roofing	3200	2800	200
.48	Roofing	3600	3100	250

Smartspan




24mm
700mm

Two degree Minimum Pitch
Tolerance L±5mm W±2mm




BMT	SPANS:	Internal	End	Overhang
.42	Walling	3200	3000	200
.42	Roofing	2400	1800	200
.48	Roofing	3000	2200	250

CGI Mini

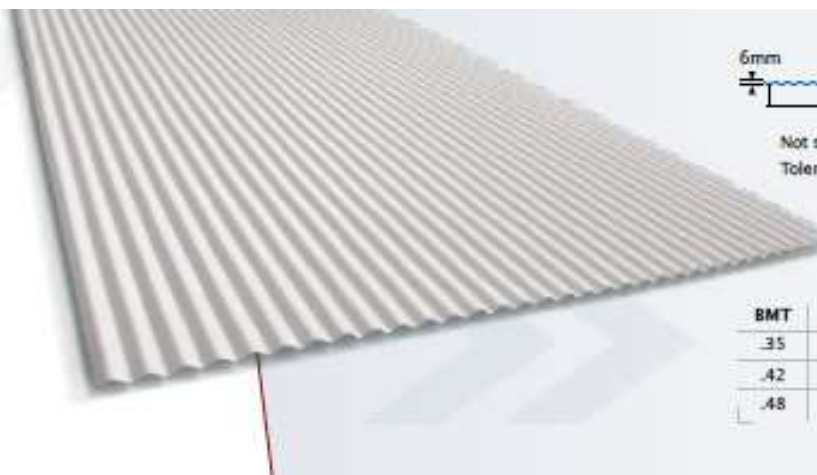

6mm
825mm

Not suitable for roofing use
Tolerance L±5mm W±2.5mm




BMT	SPANS:	Internal	End	Single
.35	Walling	1000	900	800
.42	Walling	1200	1000	900
.48	Walling	1300	1100	1000

Maxiclad



Polycarbonate Sheeting

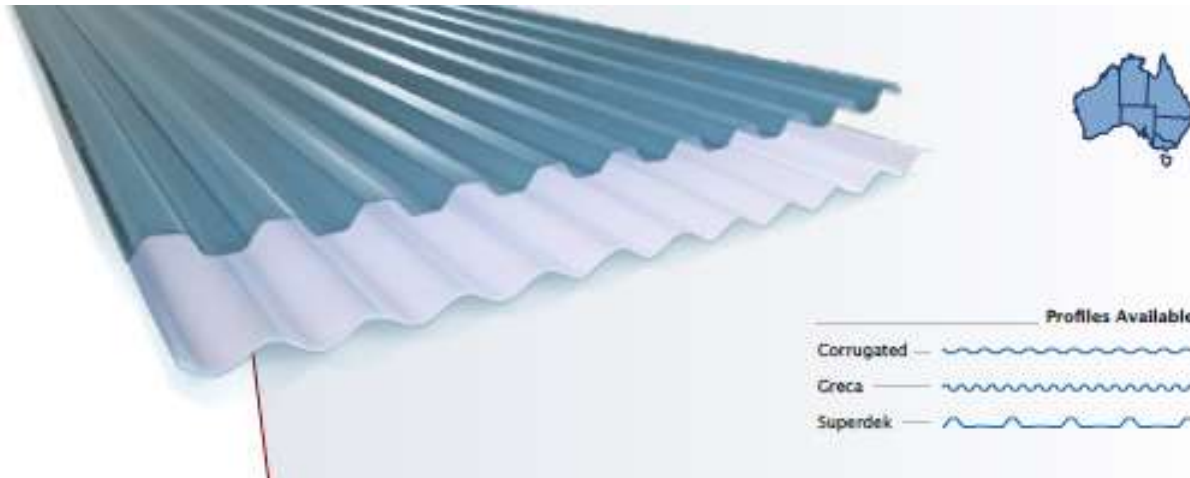

Fibreglass Sheeting

